

## KLCOB V2 Series

- Extraordinary deep blacks: unique black polymer coating
- Capture every brilliance: 15000:1 stunning contrast, 600-1000nits brightness, 3840Hz refresh rate
- Stay cool, enjoy more: Leveraging advanced flip-chip and HBB common cathode technologies
- Strong against external impact: flip-chip technology, KLCOB V2 offers 360° all-around protection



Parameters	KLCOB0.7 V2	KLCOB0.9 V2	KLCOB1.2 V2	KLCOB1.5 V2
Pixel pitch (mm)	0.78	0.93	1.25	1.56
LED type	Flip-chip RGB	Flip-chip RGB	Flip-chip RGB	Flip-chip RGB
Brightness (nit)	600~1000	600~1000	600~1000	600~800
Panel dimensions (WxHxD)	600x337.5x39.3mm(24.02x13.50x1.93")			
Contrast ratio	15000:1	15000:1	15000:1	15000:1

## NX Series


- Corporate, mall, chain store, transportation hub, etc.
- Native 16:9, 27.5". Superior 4K/8K visual experience
- Chip-level energy saving technology
- Up to 7680Hz high refresh rate
- Front/rear maintenance of module, PSU, receiving card, etc.



Parameters	NX1.2	NX1.5	NX1.8	NX2.5
Pixel pitch (mm)	1.2	1.5	1.87	2.5
LED type	SMD1010	SMD1212	SMD1515	SMD1515
Brightness (nit)	600	800	800	800
Panel dimensions (WxHxD)	960x540x43.5mm(37.80x21.26x1.71") / 960x270x43.5mm(37.80x10.63x1.71") / 240x540x43.5mm(10.63x21.26x1.71") / 240x810x43.5mm(10.63x31.89x1.71") / 240x1080x43.5mm(10.63x42.52x1.71")			
Panel weight	10.5kg(23.14lbs)	10.5kg(23.14lbs)	10.5kg(23.14lbs)	10.5kg(23.14lbs)

## K V3 Series

- Mall, chain store, 4S car dealership, theme park, etc.
- 3+1+1 configuration, lightweight design
- Energy-Saving Technology
- Remote monitoring, cluster management
- Front/rear maintenance of module, PSU, receiving card, etc.

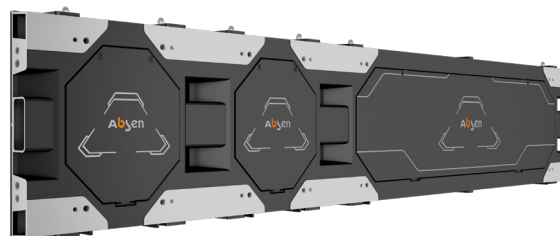

Parameters	K1.5 V3	K1.8 V3 Normal	K1.8 V3 High brightness	K2.5 V3 Normal	K2.5 V3 High brightness	K3.9 V3 Normal	K3.9 V3 High brightness
Pixel pitch (mm)	1.56	1.89	1.89	2.5	2.5	3.9	3.9
LED type	Black SMD1212	Black SMD1515	SMD1415	Black SMD1515	SMD1415	Black SMD2121	SMD1921
Brightness (nit)	700	700	3000	700	3000	700	3000
Panel dimensions (WxHxD)	750x250x39.5mm(29.52x9.84x1.55") / 1000x250x39.5mm(39.37x9.84x1.55") / 1250x250x39.5mm(49.21x9.84x1.55")						
Panel weight	4.6kg(10.14lbs) / 6.2kg(13.66lbs) / 7.9kg(17.41lbs)						